



Defender™ 3000 Xtreme

Washdown Bench Scales



Designed with affordability in mind, but with no compromise on quality!

The OHAUS Defender™ 3000 Xtreme Series economy line of bench scales is ideal for general weighing and simple counting applications in wet or damp environments. The Defender 3000 Xtreme Series feature a simple, yet rugged, tubular-frame base design and indicators with tactile keys, backlit LCD display, built-in rechargeable battery operation and flexible mounting capabilities. The Defender 3000 Xtreme Series is the solution to your weighing applications that require dependability within an affordable budget.

Standard Features Include:

- Four capacity models: 60lb/30kg, 150lb/60kg, 300lb/150kg, and 600lb/300kg
- Maximum resolution 1:6,000-7,500d
- 304 stainless steel pan with stainless steel frame and stainless steel IP67 load cell
- Indicator features a stainless steel housing with NEMA 4X / IP65 protection
- Adjustable non-slip rubber leveling feet with externally visible level indicator
- Multiple weighing units: lb, oz, lb:oz, kg, g
- Parts counting mode with selectable sample sizes, last sample size and average piece weight data
- 1-in/25mm high LCD weight display with high-contrast backlight
- Built-in RS232 for printing and data connection
- Internal universal switching power supply and 58-hour internal rechargeable battery included

Defender™ 3000 Bench Scales

Specifications

| Models | D32XW30VR | D32XW60VR | D32XW60VL | D32XW150VL | D32XW150VX | D32XW300VX |
|--|--|--|--|--|--|---|
| Capacity x Readability (d) | 60 lb x 0.01 lb 960 oz x 0.2 oz 60 lb x 0.2 oz (lb:oz) 30 kg x 0.005 kg 30,000 g x 5 g | 150 lb x 0.02 lb 2,400 oz x 0.5 oz 160 lb x 0.5 oz (lb:oz) 60 kg x 0.01 kg 60,000 g x 10 g | 150 lb x 0.02 lb 2,400 oz x 0.5 oz 160 lb x 0.5 oz (lb:oz) 60 kg x 0.01 kg 60,000 g x 10 g | 300 lb x 0.05 lb 4,800 oz x 1 oz 300 lb x 1 oz (lb:oz) 150 kg x 0.02 kg 150,000 g x 20 g | 300 lb x 0.05 lb 4,800 oz x 1 oz 300 lb x 1 oz (lb:oz) 150 kg x 0.02 kg 150,000 g x 20 g | 600 lb x 0.1 lb 9,600 oz x 2 oz 600 lb x 2 oz (lb:oz) 300 kg x 0.05 kg 300,000 g x 50 g |
| Maximum Displayed Resolution | 1:6,000 | 1:7,500 | 1:7,500 | 1:7,500 | 1:7,500 | 1:6,000 |
| Scale Protection | NEMA 4X / IP65 | | | | | |
| Base Construction | 304 stainless steel pan with stainless steel frame, non-slip rubber leveling feet | | | | | |
| Platform Dimensions (WxDx min H) | 12 x 14 x 4.8 in / 305 x 355 x 123 mm | | 16.5 x 21.6 x 5.4 in / 420 x 550 x 136 mm | | 19.7 x 25.6 x 5.8 in / 500 x 650 x 147 mm | |
| Front View Dimensions (F1 x F2 x F3 x F4 x F5 x F6) | 8.2 x 6.5 x 12 x 4.8 x 3 x 10 in 210 x 166 x 305 x 119 x 75 x 256 mm | | 8.2 x 6.5 x 16.5 x 5.4 x 3.2 x 14.6 in 210 x 166 x 420 x 145 x 80 x 371 mm | | 8.2 x 6.5 x 19.7 x 5.6 x 3.5 x 17.3 in 210 x 166 x 500 x 154 x 90 x 440 mm | |
| Side View Dimensions (S1 x S2 x S3 x S4 x S5) | 22.5 x 18.6 x 14 x 12 x 2 in 572 x 472 x 355 x 306 x 52 mm | | 36.2 x 26.3 x 21.7 x 19.7 x 2 in 920 x 668 x 550 x 500 x 52 mm | | 36.2 x 29.1 x 25.6 x 23.2 x 2 in 920 x 740 x 650 x 590 x 52 mm | |
| Column | 13.8 in / 350 mm fixed height, stainless steel | | 27.6 in / 700 mm fixed height, stainless steel | | | |
| Leveling Component | Externally visible level bubble and adjustable leveling feet with locking nuts | | | | | |
| Safe Overload Capacity | 125% of rated capacity | | | | | |
| Indicator Construction | Stainless steel | | | | | |
| Weighing Units | lb, oz, lb:oz, kg, g | | | | | |
| Functions | Weighing, Parts Counting | | | | | |
| Weight Display | 6-digit, 7-segment backlit LCD, 1 inch / 25 mm high digits | | | | | |
| Keyboard | 4 function mechanical keys, raised, tactile | | | | | |
| Stabilization Time | Within 2 seconds | | | | | |
| Auto-zero Tracking | Off, 0.5, 1 or 3 divisions | | | | | |
| Key Zeroing Range | 2% or 100% of capacity | | | | | |
| Span Calibration | 5 lb/kg to 100% of capacity, user selectable | | | | | |
| Power | 100 - 240 VAC/50-60 Hz internal switching power supply with internal rechargeable sealed lead-acid battery (58-hour typical operation with full charge) | | | | | |
| Interface | Bidirectional RS232C | | | | | |
| Operating Temperature Range | 14°F to 104°F / -10°C to 40°C, Maximum relative humidity 80 % for temperatures up to 88°F / 31°C, decreasing linearly to 50 % relative humidity at 104°F / 40°C, non condensing | | | | | |
| Net Weight | 33 lb / 15 kg | | 53 lb / 24 kg | | 84 lb / 38 kg | |
| Shipping Weight | 41 lb / 19 kg | | 61 lb / 28 kg | | 96 lb / 44 kg | |
| Shipping Dimensions | 25.3 x 19.6 x 8.5 in / 642 x 497 x 212 mm | | 33.7 x 22.2 x 8.9 in / 857 x 564 x 225 mm | | 40.2 x 27 x 9.7 in / 1022 x 687 x 247 mm | |


Features

Stainless steel housing with backlit LCD weight display, tactile membrane switches, built-in bidirectional RS232C with manual/continuous/interval printing, hardware configuration lockout switch, internal universal switching power supply and internal sealed lead-acid rechargeable battery. Software included for parts counting mode with selectable sample sizes, selectable span calibration points, averaging level, auto-zero tracking, power saving auto-off, Geo Code geographical gravity calibration adjustment and software menu lockouts. Stainless steel pan with stainless steel tubular frame, non-slip rubber leveling feet with locking nuts, externally visible level bubble, stainless steel IP67 load cell, down-stops for overload protection, hollow tubular stainless steel columns.

Compliance

- Safety and EMC: EN60950, EN61326, FCC Class A, CE (AC adapter), _cUL_{us}
- Quality: OHAUS quality management system registered to ISO 9001:2008

Outline Dimensions

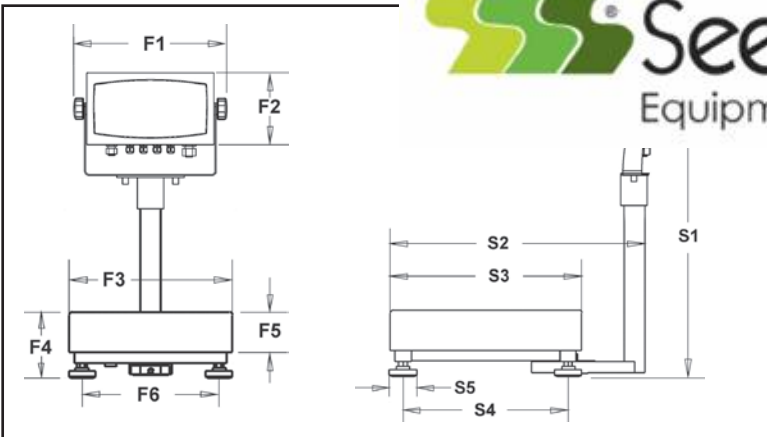

OHAUS CORPORATION

* 19A Chapin Road
P.O. Box 2033
Pine Brook, NJ 07058 USA

Tel: 800.672.7722
973.377.9000
Fax: 973.944.7177

www.ohaus.com

With offices throughout Europe,
Asia, and Latin America

* ISO 9001
Registered Quality Management System

80774334_F © Copyright Ohaus

